


technical information

The NetKey® patch cords support network applications in main, horizontal and equipment distribution areas and are available in riser (OFNR) and low smoke zero halogen (LSZH) rated jacket materials. In addition, pre-terminated fiber optic pigtails support fusion splice field termination applications.

Both fiber optic patch cords and pigtails are available in OM3, OM4 and OS2 fiber types. These patch cords and pigtails meet requirements of TIA/EIA-568-C.3-1. The fiber connectors are also FOCIS compliant or compatible to meet the requirements of TIA/EIA-455-21A. Quality control reference label provides lifetime traceability of test data.

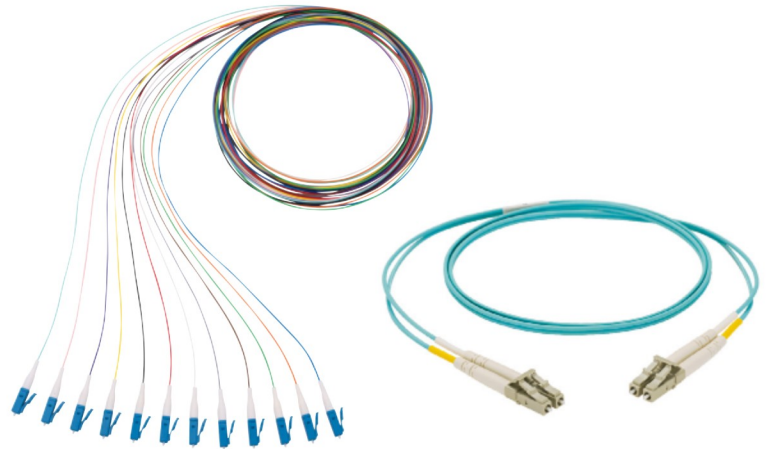

applications

Provide interconnect and cross-connect of applications in entrance facilities, telecommunications rooms, data centers, and at the desk. Support network applications to interconnect pre-terminated cassettes in main distribution, horizontal distribution, and equipment distribution areas. Riser rated patch cords support installations that require this flame rating in specific environments.

standards

Standards requirements:	TIA/EIA 568-C.3-1 and ISO/IEC 61755-3-1 IEC-61754-7 (International) TIA-604-3-A, and -10-A FOCIS -3, and -10
--------------------------------	---

optical properties

Insertion loss:	All fiber types:	0.30dB max.
Return loss:	OS2:	50dB min.
	OM3:	26dB min.
	OM4:	26dB min.

construction

Fiber size:	Pigtails:	900µm tight-buffered fiber
	Patch Cords:	1.6mm or 3.0mm duplex jacketed zip cord cable
Cable jacket ratings:	Riser (OFNR):	Per UL 1666 and c(UL) FT-4
	Low Smoke Zero Halogen (LSZH):	Per IEC 60332-1, IEC 60754-2, IEC 61034
Connector types:	LC and SC	
Jacket color:	OS2:	Yellow
	OM3:	Aqua
	OM4:	Aqua
Fiber types:	Singlemode:	OS2
	Multimode:	OM3
		OM4

NetKey® Fiber Optic Patch Cords and Pigtails

part number

Example: NKFP92ERLLSM001 = Fiber OS2, 2-fiber, 1.6mm cable, riser rated, LC duplex to LC duplex, Standard IL, 1 meter

Character	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Example	N	K	F	P	9	2	E	R	L	L	S	M	0	0	1

1, 2, 3, 4 – Fiber Product

NKFP = NetKey Fiber Patchcord/
Pigtail

5 – Fiber Type

9 = OS2
X = OM3
Z = OM4

6 – Fiber Count

1 = 1-fiber
2 = 2-fiber

7 – Cable Type

B = 900µm buffer
2 = 2mm (OM4)
E = 1.6mm (OM3, OS2)
3 = 3.0mm (Only for SC to SC cords)

8 – Jacket Type

N = No jacket
(900µm tight buffered pigtail)
L = LSZH
(Low Smoke Zero Halogen)
R = OFNR (Riser)
P = Plenum

9 – Connector Type – End A

1 = LC simplex
3 = SC simplex
A = LC simplex with short boot
B = LC duplex with short boot
D = SC duplex with short boot
E = LC/APC simplex
F = SC/APC simplex
L = LC duplex
S = SC duplex
X = LC/APC duplex
Y = SC/APC duplex

10 – Connector Type – End B

1 = LC simplex
3 = SC simplex
A = LC simplex with short boot
B = LC duplex with short boot
D = SC duplex with short boot
E = LC/APC simplex
F = SC/APC simplex
L = LC duplex
S = SC duplex
X = LC/APC duplex
Y = SC/APC duplex
N = Pigtail (no connector)

11 – Polarity or Jacket Color*

S = Standard A-B
T = Polarity A-A
N = No variant (Simplex)
K = 12 color pigtail kits
X = Non-Standard
Y = Standard A-B, no clip,
30cm breakout
Z = Standard A-B, no clip

B = Blue
G = Gray
J = Rose
O = Orange
P = Pastel Green
R = Red
V = Violet


* Jacket Color MOQ 1Km

12 – Unit of Length or Bulk Pack

M = Meters
T = Meters (10-pack)
Q = Meters (25-pack)

13, 14, 15 – Length

001 – 050
Half meter lengths upon request

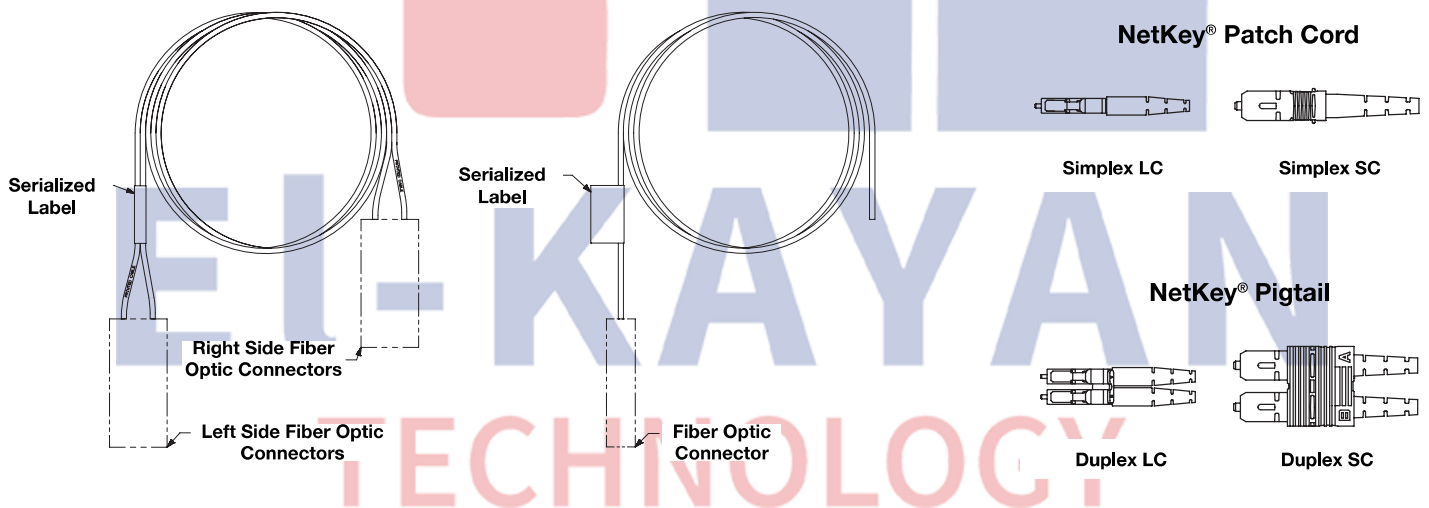

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

PANDUIT®

For more information
Visit us at www.panduit.com
Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

©2023 Panduit Corp.
ALL RIGHTS RESERVED.
NKSP76-WW-ENG
Replaces NKDS51
8/2023