

PatchLink™ Horizontal Cable Managers

SPECIFICATIONS

Horizontal cable managers shall be capable of managing cables on the front and rear of any 19" EIA rack. The manager shall consist of a 1-piece construction that is molded out of plastic. Horizontal managers shall have pass through holes that incorporate integral bend radius control as well as fingers with rounded edges. The manager shall have rigid end fingers that incorporate integral bend radius control. Hinged covers shall allow access to the cable pathway without having to completely remove the cover from the manager.



TECHNICAL INFORMATION

<i>Attributes:</i>		Part Number	RU	Manger Height in. (mm)	Width in. (mm)	Depth in. (mm)
		WMP1E	2	3.5 (88)	19.0 (483)	8.9 (225)
		WMPF1E				3.7 (94)
		WMPH2E				8.9 (225)
		WMPHF2E				3.7 (94)
		WMPSE	1	1.7 (44)	19.0 (483)	8.9 (225)
		WMPFSE				3.7 (94)
		WMP LSE				7.9 (200)
		WMP LFSE				2.7 (69)
<i>Temperature rating:</i>	Max storage temperature: 149°F (65°C) Max operating temperature: 140°F (60°C)					
<i>Packaging:</i>	Cable managers include hinged cover(s), mounting hardware					

KEY FEATURES AND BENEFITS

<i>Integral bend radius control:</i>	Maintains bend radii as cables transition to and from horizontal and vertical pathway
<i>Dual hinged cover:</i>	Opens upward or downward to provide easy access to cables in horizontal pathway without having to completely remove cover
<i>Increased finger spacing:</i>	Provides larger area for high performance Category 6 cables
<i>One piece, plastic construction:</i>	Provides durability and easy installation
<i>Rounded edges on fingers:</i>	Protect cables from snags and damage to cable
<i>Cable pass through holes:</i>	Provide ease of installation and cable maintenance

APPLICATIONS

PatchLink Horizontal Cable Managers provide a neat and efficient way to manage patch cables on any EIA 19" rack. They can be used in multimedia applications to manage copper, fiber optic, and coax cables. Flexible fingers organize the patch cords simplifying moves, adds, and changes while the integral bend radius control and closed design protects the patch cables in the pathway. All of these features combine to provide the user with a horizontal cable management solution that simplifies cable routing in a finished, professional appearance. When used with the Mini-Com® patch panels, patch cords, vertical cable managers, and racks, the user receives a total system that satisfies functional and aesthetic requirements for telecommunications rooms.

PatchLink Horizontal Cable 2 RU Managers

Front and Rear, with bend radius clips: WMPH2E

Front and Rear: WMP1E

Front only, with bend radius clips: WMPHF2E

Front only: WMPF1E

PatchLink Horizontal Cable 1 RU Managers

Front and Rear: WMPSE

Front and Rear, short depth: WMP LSE

Front only: WMPFSE

Front only, short depth: WMP LFSE

Rack Systems

2-Post Rack with threaded rails, 3" deep: R2P^{^+}

4-Post Rack with #12-24 threaded rails: R4P^{***+}

Panel Extender Brackets

Brackets: PEB^{^^}

Radius Control Clip: CMBRC1

**Depth other than 30 in.: 23, 36, 42

^Height, in.: 79, 96

^^RU: 1 or 2


+Color: WH (White)



All Part Numbers Compliant with the U.S. Trade Agreements Act (TAA) for purchases shipped to the United States.

PatchLink Horizontal™ Cable Managers

Part Number	Front				Rear					
	Chanel Area (in. ²)	Cat. 6A (28 AWG - 0.185 in.)	Cat. 6A (24 AWG - 0.275 in.)	Cat. 6 (28 AWG - 0.150 in.)	Cat. 6 (24 AWG - 0.235 in.)	Chanel Area (in. ²)	Cat. 6A (28 AWG - 0.185 in.)	Cat. 6A (24 AWG - 0.275 in.)	Cat. 6 (28 AWG - 0.150 in.)	Cat. 6 (24 AWG - 0.235 in.)
WMP1E	6.8	101	45	153	62	9.1	134	60	204	83
WMPF1E						-	-	-	-	-
WMPH2E						9.1	134	60	204	83
WMPHF2E						-	-	-	-	-
WMPSE	2.7	40	18	61	25	4.6	68	30	104	42
WMPFSE						-	-	-	-	-
WMPLE	1.7	25	11	38	15	4.6	68	30	104	42
WMPLEFSE						-	-	-	-	-

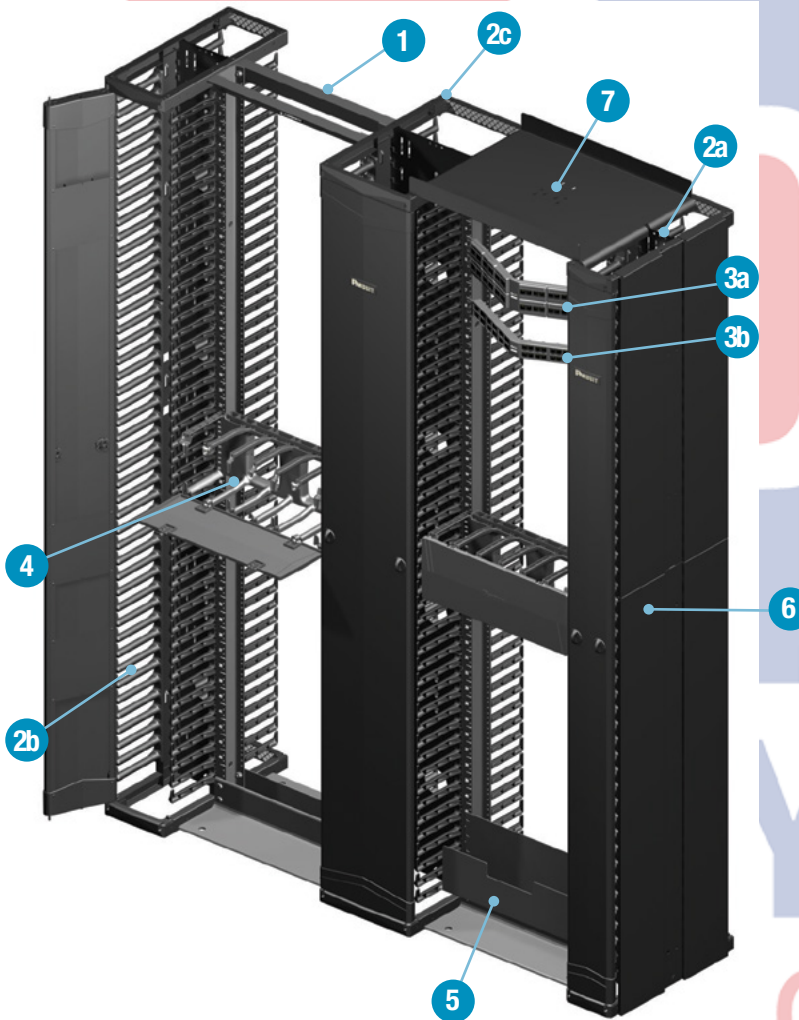

1 R2P – 19" Standard EIA Rack 19" x 7", 45 RU

PatchRunner™ 2 Vertical Cable Managers and Doors

- 2a** PR2VD06 – 6" wide
- 2b** PR2VD08 – 8" wide
- 2c** PR2VD12 – 12" wide

Angled Modular Patch Panels

- 3a** CPPLA48WBLY – 2 RU, 48-Port
- 3b** CPPA48HDWBLY – 1 RU, High Density 48 – Port

Cable Management Accessories

- 4** PR2HF4 – Cable Manager, 4 RU
- 5** CMT4 – Trough, 4 RU
- 6** PR2VEP – End Panel
- 7** PR2VWF – Waterfall

WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA
Phone: 800.777.3300

PANDUIT EUROPE LTD.
London, UK
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.
Republic of Singapore
Phone: 65.6305.7575

PANDUIT JAPAN
Tokyo, Japan
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA
Guadalajara, Mexico
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.
Victoria, Australia
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to www.panduit.com/warranty

PANDUIT®

For more information
Visit us at www.panduit.com
Contact Customer Service by email: cs@panduit.com
or by phone: 800.777.3300

© 2023 Panduit Corp.
ALL RIGHTS RESERVED.
RKSP154-WW-ENG
6/2024