


# TX6A™ Category 6A Shielded U/FTP Copper Cable

Europe

**PANDUIT™**  
SPECIFICATION SHEET

## SPECIFICATIONS

Category 6A cable shall meet the IEC 61156-5 and ANSI/TIA-568.2-D Category 6A component standards. The conductors shall be 23 AWG construction with SFS-PO insulation. Each individual pair shall have a metallic foil shield and all four pairs shall be covered with a low smoke zero halogen (LSZH) jacket. The shielded cable shall provide superior alien crosstalk performance. The TX6A Shielded Cable must be installed as part of the TX6A Shielded Copper Cabling System to achieve certified 10GBASE-T performance.



## TX6A Category 6A Shielded U/FTP Copper Cable

**LSZH:** PUFL6X04\*\*-HED

\*\*Colors: BU (Blue), WH (White), RD (Red), OR (Orange), YL (Yellow), GR (Green), VL (Violet), IG (International Gray), or BL (Black)

## TECHNICAL INFORMATION

<b>Electrical performance:</b>	Certified channel performance in a 4-connector configuration up to 100 meters and exceeds ISO 11801 Class EA and ANSI/TIA-568.2-D Category 6A standards for supporting 10GBASE-T transmission over twisted-pair cabling systems as part of the TX6A Copper Cabling System. Certified component performance up to 100 meters and exceeds the IEC 61156-5 and ANSI/TIA-568.2-D Category 6A component standards for supporting 10GBASE-T transmission over twisted-pair cabling systems.
<b>Conductors/insulators:</b>	23 AWG bare copper wire covered by SFS-PO insulation
<b>Insulation diameter:</b>	1.27mm-1.30mm
<b>Flame rating:</b>	IEC 60332-1, IEC 60754, and IEC 61034 EN50575: Euroclass Cca-s2-d2-a1
<b>PoE compliance:</b>	Meets IEEE 802.3af, IEEE 802.3at, and IEEE 802.3bt for PoE applications
<b>Installation Tension:</b>	110 N (25 lbf) maximum
<b>Temperature rating:</b>	0°C to 50°C during installation -20°C to 75°C during operation
<b>Cable jacket:</b>	Low Smoke Zero Halogen (LSZH)
<b>Cable diameter:</b>	7.2mm nominal
<b>Cable weight:</b>	25 kg/500m
<b>Packaging:</b>	500m on a reel Package tested to ISTA procedure 1A
<b>Standards and flame ratings:</b>	IEC 60332-1; IEC 60754; IEC 61034; EN 50575: EuroClass Dca-s2,d2,a1

## KEY FEATURES AND BENEFITS

<b>Packaging:</b>	Packaging Prevents the coupling near-end crosstalk and alien crosstalk between twisted pairs to ensure 10GBASE-T transmission performance
<b>Internal drain wire:</b>	Facilitates grounding of the cable and provides for efficient performance and protection of network investment
<b>Descending length cable markings:</b>	Easy identification of remaining cable reduces installation time and cable scrap

## APPLICATIONS


TX6A Shielded Copper Cable is a component of the TX6A Shielded Copper Cabling System. This end-to-end system provides a cost-effective medium for ensuring that network bandwidth needs are easily met today and tomorrow. The shielded cabling system provides high performance, excellent EMI suppression, and aids in secure data transmission. The Panduit solution helps ensure organizations efficiently and reliably meet their data transmission needs. Usage of the TX6A Shielded Copper Cabling System include high bandwidth applications within data centers and connections to high-end workstations such as:

- Stacking switches and switch-to-switch links
- Storage area networks
- Aggregation of Gigabit Ethernet channels
- Real-time intensive financial transactions
- Animation
- Scientific modeling
- Medical imaging

# TX6A™ Category 6A Shielded U/FTP Copper Cable

Mechanical Testing	
Ultimate Breaking Strength	>400 N (90 lbf)
Minimum Bend Radius	8 x cable diameter
Electrical Testing	
Nominal Velocity of Propagation (NVP)	76% nominal
Operating Voltage, Maximum	80 V

## ENGINEERING DRAWING

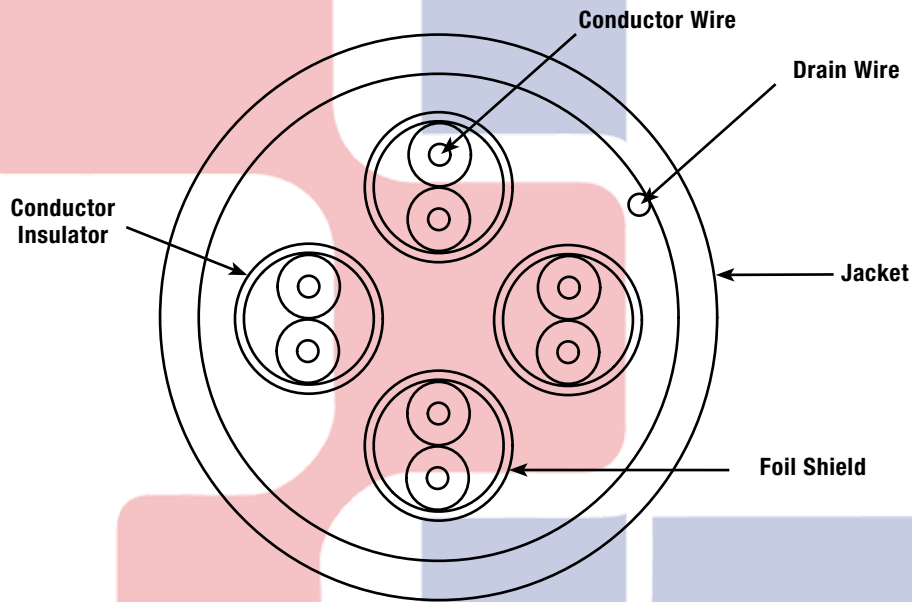

EL-KAYAN  
TECHNOLOGY

### WORLDWIDE SUBSIDIARIES AND SALES OFFICES

PANDUIT US/CANADA  
Phone: 800.777.3300

PANDUIT EUROPE LTD.  
London, UK  
Phone: 44.20.8601.7200

PANDUIT SINGAPORE PTE. LTD.  
Republic of Singapore  
Phone: 65.6305.7575

PANDUIT JAPAN  
Tokyo, Japan  
Phone: 81.3.6863.6000

PANDUIT LATIN AMERICA  
Guadalajara, Mexico  
Phone: 52.33.3777.6000

PANDUIT AUSTRALIA PTY. LTD.  
Victoria, Australia  
Phone: 61.3.9794.9020

For a copy of Panduit product warranties, log on to [www.panduit.com/warranty](http://www.panduit.com/warranty)

**PANDUIT™**

For more information  
Visit us at [www.panduit.com](http://www.panduit.com)  
Contact Customer Service by email: [cs@panduit.com](mailto:cs@panduit.com)  
or by phone: 800.777.3300

©2024 Panduit Corp.  
ALL RIGHTS RESERVED.  
COSP586-WW-ENG  
1/2024